


DATE:	PROJECT:	TYPE:
-------	----------	-------

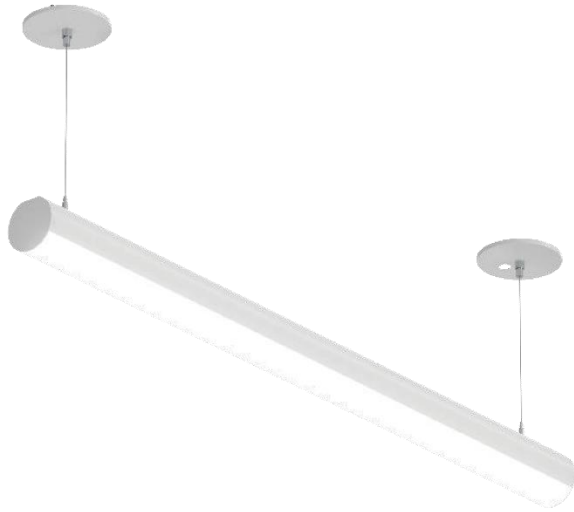

Product Description

- Spec Lighting's HOOP offers full customization to meet very specific requirements .
- Linear lights are designed to create a balanced blend of functionality and ambiance, delivering a consistent, even distribution of light that enhances the atmosphere of any space .
- Fixtures can be suspended or seamlessly joined together for extended runs, ensuring they meet specific project requirements
- High effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.


Features

- Surge protector.
- Aluminum profile design optimizes shipping, storage, and handling.
- Available in 4CCT – 30K, 35K, 40K, 50K
- Shallow depth provides sleek, low-profile appearance.
- High quality LED Chips provide high efficiency, heat dissipation, stability, and lumen maintenance.
- Driver disconnect provided where required to comply with US and Canadian codes.
- Class II/P driver, with 0-10V or Triac dimming.
- Ambient temperature: -20 40C (-4F to +104F)
- Damp Location Rated

Applications

- High-end Retail
- Retail Reception
- Offices
- Education Facilities

Dimensions



Ordering Code

ITEM	WATTS	EFFICACY	LUMENS	CRI	PF	DIMENSIONS (L*W*h) INCH		
SL-HOOP-2FT	20W	115lmw	2,300lm	≥80	>0.95	23.74	3.39	3.23
SL-HOOP-4FT	40W	115lmw	4,600lm	≥80	>0.95	47.17	3.39	3.23
SL-HOOP-8FT	80W	115lmw	9,200lm	≥80	>0.95	94.02	3.39	3.23

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.


DATE:	PROJECT:	TYPE:
-------	----------	-------

Ordering Code

EX: SL-HOOP-ML-40W-4-P-30-D1

- | | | | | |
|---|---|---|---|---|
| <p>SERIES</p> <ul style="list-style-type: none"> • SL-HOOP | <p>LENS</p> <ul style="list-style-type: none"> • FR – Frosted (standard) • ML – Milk • CL – Clear Lens • LV – Louver | <p>DRIVER</p> <ul style="list-style-type: none"> • TR – Triac • 0-10 – 0-10% | <p>LENGTH</p> <ul style="list-style-type: none"> • 2 – 2' • 4 – 4' • 8 – 8' | <p>MOUNTING</p> <ul style="list-style-type: none"> • S – Surface • P – Pendant |
| <p>CCT</p> <ul style="list-style-type: none"> • 30 – 3000K • 35 – 3500K • 40 – 4000K • 50 – 5000K • CCT – 4CCT | <p>DRIVER</p> <ul style="list-style-type: none"> • D1 – 120-277V • D2 – 347V | <p>ACCESSORIES</p> <ul style="list-style-type: none"> • MS – Motion Sensor • EM – Emergency Battery • EMS – Motion Sensor and EM | | |

Photometric

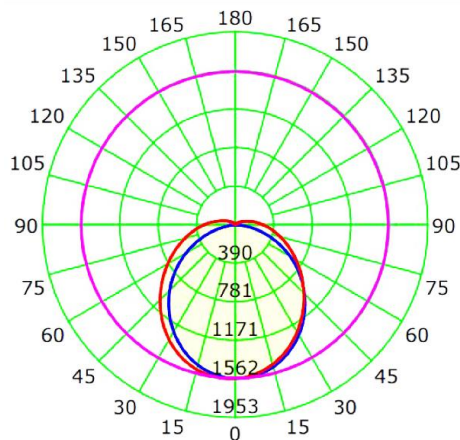

Luminaire	4000K
Input Voltage (VAC)	120 – 277
Power (W)	42.65W
Delivered Lumen (Lm)	4967.4 Lm
Efficacy (Lm / W)	116Lm / W
Beam Angle	H106.2 V116.6
Power Factor (PF)	>95
Color Rendering Index (CRI)	>80

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.