

DATE:	PROJECT:	TYPE:
-------	----------	-------



Features

- Available in 1, 2, 3 and 4 light configurations
- Available in Non-IC or IC Rated
- ETL listed for damp locations
- 30° vertical tilt, 360° horizontal rotation
- 3CCT range changeable
- 5 year Spec Lighting product warranty

WATT	LUMENS	LUMENS / WATT
20	1600	80

Description

Deco Multiple Series delivers impressive performance and represents innovation in design and technology .

Trimmed and trimless options allow flexibility when integrating to building architecture, and is a sustainable solution for commercial, corporate, and upscale residential applications.



5 Year Limited Warranty



ETL Certificate



Dimming



3cct Colour Changing




IC Rated



LED CRI


Beam Angles

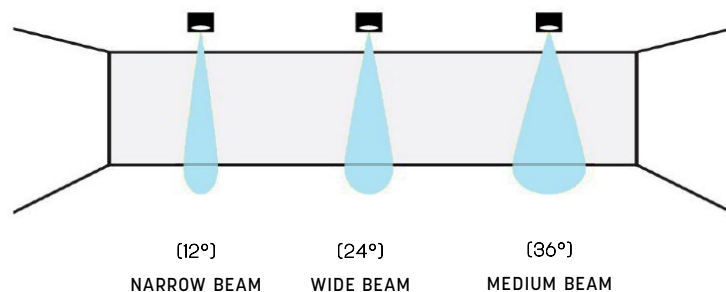

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.

DATE:	PROJECT:	TYPE:
-------	----------	-------

Dimensions

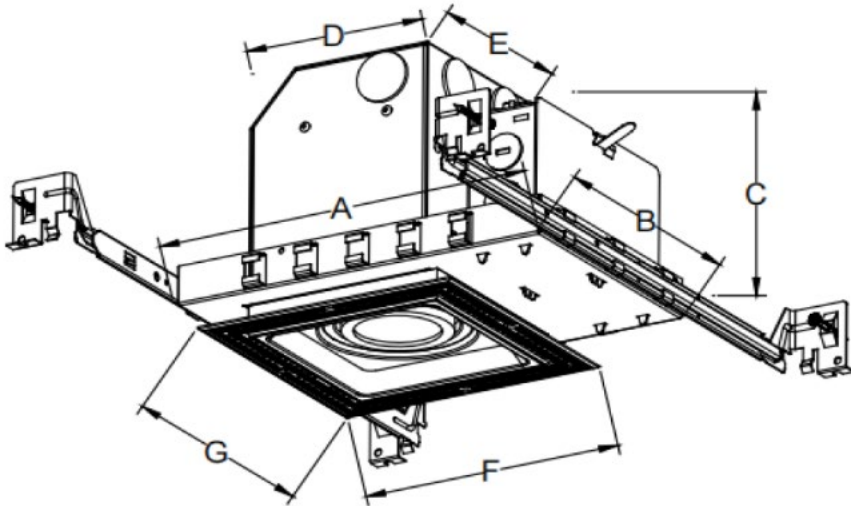

MODEL	OVERALL			HOUSING		TRIM		CEILING / CUT-OUT	
	Length	Width	Height	Length	Width	Length	Width	Length	Width
	A	B	C	D	E	F	G		
SLDL 10	9 1/8" (232)	5 7/8" (149)	6 1/2" (164)	4 1/4" (109)	4 1/4" (109)	6 1/8" (154)	6 1/8" (154)	4 5/8" (118)	4 5/8" (118)
SLDL 20	13 1/4" (336)	5 7/8" (149)	6 1/2" (164)	8 5/8" (220)	4 1/4" (109)	10 3/8" (264)	6 1/8" (154)	9" (228)	4 5/8" (118)
SLDL 30	17 3/8" (440)	5 7/8" (149)	6 1/2" (164)	13" (330)	4 1/4" (109)	14 3/8" (375)	6 1/8" (154)	13 5/16" (338)	4 5/8" (118)
SLDL 40	21 3/8" (544)	5 7/8" (149)	6 1/2" (164)	17 3/8" (440)	4 1/4" (109)	18 7/8" (479)	6 1/8" (154)	17 7/16" (443)	4 5/8" (118)

Construction

- Die-cast aluminum heat sink painted black.
- Trim and housing are constructed of Gauge Steel.

Mounting

- Supplied with 4 ways hanger bar, adjustable from 14 1/2"-25" to accommodate various joist construction and grid sizes.
- Hanger bars include a captive mounting "screw-nail" for ease installation. Can be accommodate a 1/2" to 1 1/4" ceiling thickness.

Electrical

- Driver: Universal (120V - 277V) or 120V input only
- Light Source: High output LED (included with housing)
- Dimming: 0-10V or ELV (see list of housings below)
- Finish: Abrasion resistant powder coat paint in Black (BK).

Optics

- 12° Spot, 24° Narrow Flood, and 36° Flood
- Up to 30° Vertical Adjustment
- 360° Horizontal Adjustment

Specifications

Item	SLDL	Certification	ETL listed. Damp listed.
Input Voltage	AC 90-305V 50/60Hz	Power Factor	> 0.98
Luminous Efficiency	80 LM/W	Rated Power	10/Lamp
Lumens	800lm/Lamp	Dimming	Dimmable
Color Temperature	2700-5000K	Lamp	COB

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.

DATE:	PROJECT:	TYPE:
-------	----------	-------

Trim Option



Open Trimmed



Closed Trimmed



Open Trimless



Closed Trimless

Order Guide

EX: SLDL-10-12-80-120V-BK-OP-TL-27K-ND

SERIES

- SLDL

Energy (W)

- 10 | 10W
- 20 | 20W
- 30 | 30W
- 40 | 40W

Optics

- 12° - Narrow Beam
- 24° - Wide Beam
- 36° - Medium Beam

CRI

- 80 | 80 CRI
- 90 | 90 CRI

VOLTAGE

- 120V - 120V
- 277V - 277V
- UNV - 120V / 277V

TRIM FINISH

- BK | BLACK
- WH | WHITE

TRIM OPTION

- OP | OPEN
- CL | CLOSED

CEILING APPEARANCE

- TL | Trimless
- TM | Trimmed

COLOR TEMP

- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 40K - 4000K
- 50K - 5000K
- A3CCT - 3000K / 4000K / 5000K
- B3CCT - 2700K / 3000K / 3500K

DIMMABLE

- ND | Non-Dim
- TM | Triac Dim (120V only)
- ELV | ELV Dim (120V only)
- 010 | 0-10 V Dim 120-277 V

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.