

KREST

PROJECT:
MODEL #:
FIXTURE TYPE:

STANDARD SPECIFICATIONS

CONSTRUCTION

Extruded aluminium, with acrylic diffuser

DIFUSSER

Milk glass diffuser. Can be mounted on ceiling or wall in all orientations

LED PERFORMANCE

- 5.2W – 500 Lumens per ft

UL listed For dry or damp locations.

MOUNTING


Mounts directly to wall or ceiling.

USE

Healthcare, Education, Multi-Family Residential
Condominiums, Retail, Corporate, Hospitality



DIMENSIONS

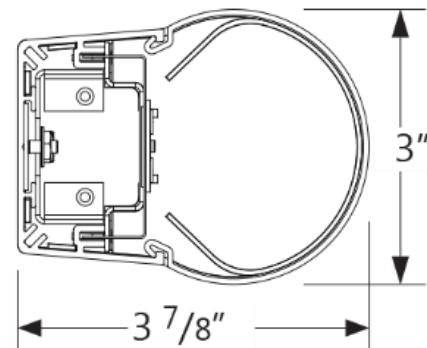

ORDERING INFORMATION

KREST

1	2	3	4	5	6
2. FINISH	3. VOLTAGE	4. COLOR TEMP.	5. DRIVER OPTION	6. LENGTH/FT.	
BN Brushed Nickel	120 120V	27K 27000K	ELV Dimmable ELV	2 2 FT	
W White	277 277V	30K 30000K	ND Non Dim	3 3FT	
BLK Black	UNV Universal	35K 35000K		4 4FT	
C Custom		40K 40000K			