

LUX LO 120V LED TAPE

DATE:	PROJECT:	TYPE:
-------	----------	-------



LUX LO LED provides the perfect touch of uniformed light where lower lumens and less consumption is required. Up to 164 ft, without the need for any remote power supplies, LUX LO can be utilized for a variety of applications.

Features

- 150 lumens per foot.
- Direct line voltage, plug & play
- Industry-leading 90 CRI
- 2 year factory warranty



Technical Information

Standard CCT 's	2700 / 3000K / 4000K	Dimmable.	Yes
Wattage per ft.	2W Per Foot	Diode Type	2835 SMD
Voltage	120V	Mounting	3M™ Self-Adhesive Tape
Tape Height	0.1 Inch	Max Spool Lengths	164'
Beam Angle	120°	Rating	IP65 Rated
		Certifications	ETL Listed

In addition to stocked colors, a wide variety of color temperatures are also available by special order. Consult factory for more information.

Ordering Code




EX: LUX-LO-120V-30K—IP65

MODEL	VOLTAGE	CCT	LENGTH	RATING
LUX-LO	120V • 120V	27K • 2700K 30K • 3000K 40K • 4000K	Blank (164 FT)	IP65 (Outdoor)

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.

DATE:	PROJECT:	TYPE:
-------	----------	-------


Technical Information

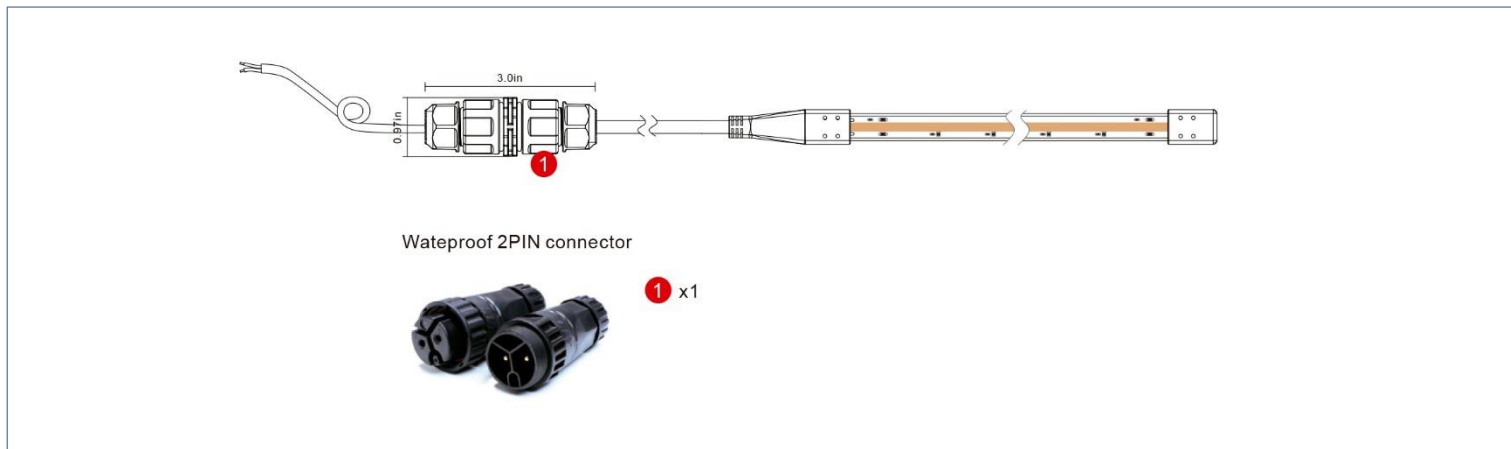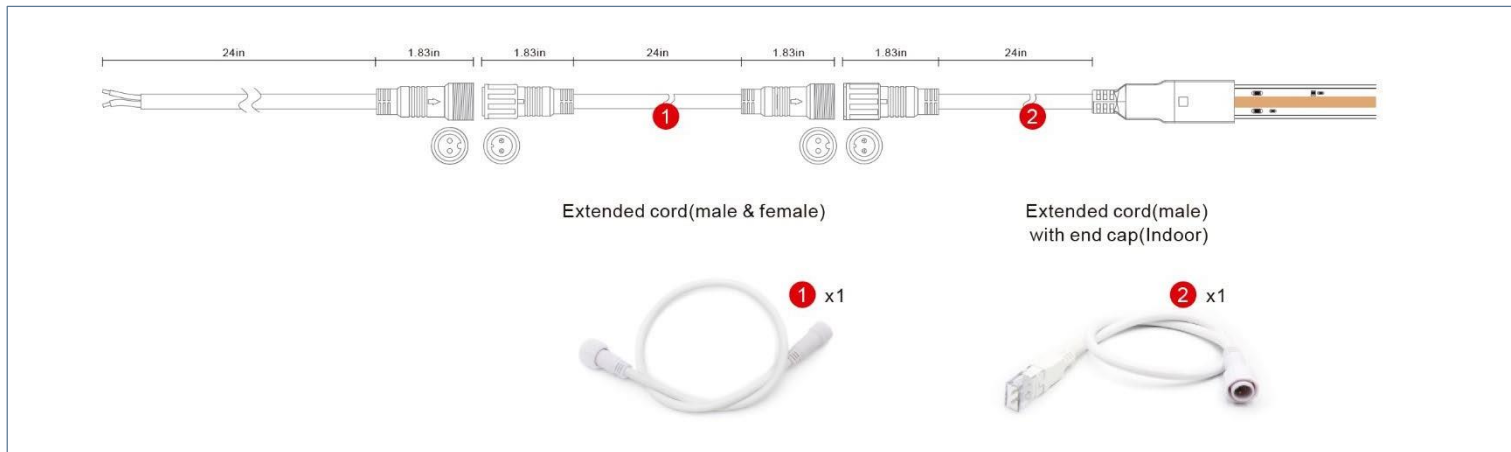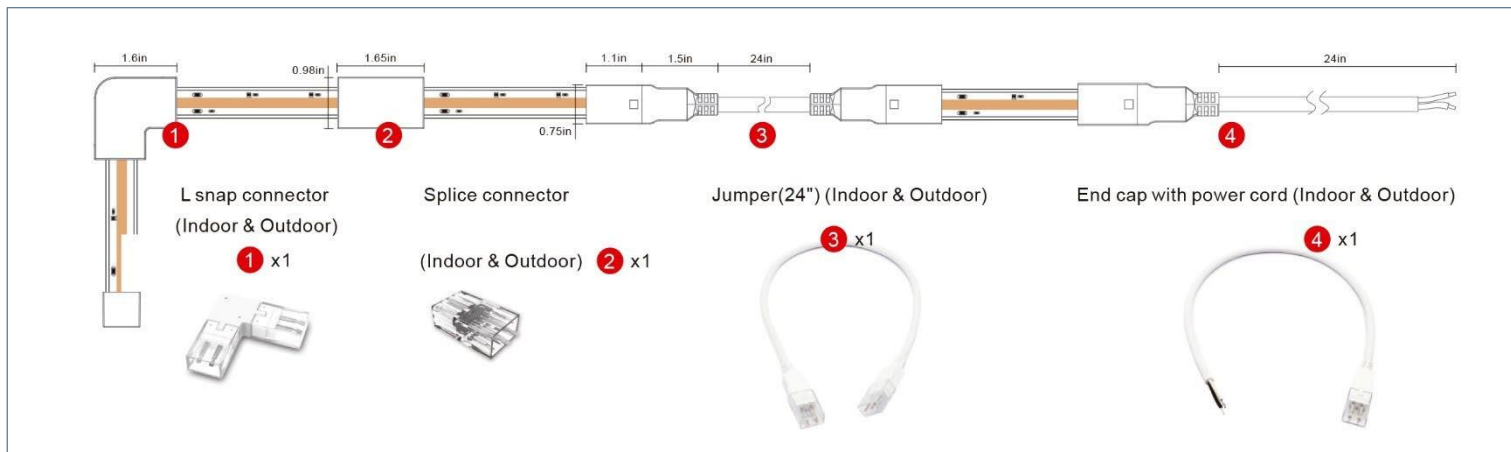


DATE:	PROJECT:	TYPE:
-------	----------	-------

Mounting Accessories


Mounting clips
0.79"×0.59"×0.45"




Screw
1.18"×0.14"




Wall plug
1.1"×0.3"



Length	Screw	Wall plug
4FT	2pcs	2pcs
164FT [roll]	83pcs	83pcs



PVC channel
0.75"×0.44"




Length

Aluminum profile



Profile
0.73"×0.31"




Length

Aluminum profile




Profile
0.79"×1.18"




Length

Aluminum profile




Profile
0.79"×0.79"



Length

Aluminum profile



SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.