MARKER

STANDARD SPECIFICATIONS

CONSTRUCTION

Marker is as artistic as it is functional, providing the perfect solution for multi-family or hotel applications, where unit numerals are to be illuminated.

LED PERFORMANCE – 3000K STANDARD

- Input Voltage: 24V (remote power supply required, by others)
- Lumens: 450
- Dimmable
- CRI: 90 CRI
- Color_Temp: 3000K
- Lighting Direction: Down
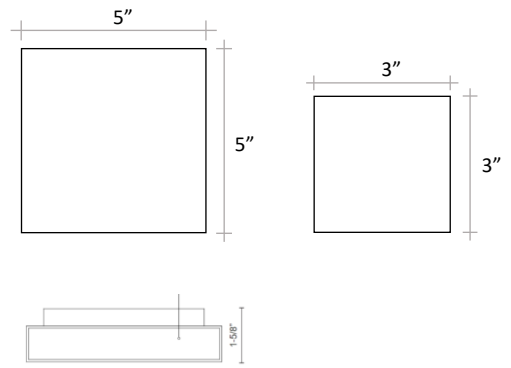- UL listed for dry locations

MATERIAL

Aluminum, stainless steel

MOUNTING

Mounting on factory provided plate. Remote power supply required.

DIMENSIONS

5"
5"

3"
3"

1-5/8"

ORDERING INFORMATION

MARK	-		-		-		-		-		-	
1		2		3		4		5		6		7

2. VOLTAGE

24	24V

3. WATTAGE

3"	5W - 450 Lumens
5"	10W - 900 Lumens

4. COLOR TEMP.

27K	2700K
30K	3000K
35K	3500K
40K	4000K

5. LIGHT OPTIONS

DL	Down Light
U/DL	Up/Down Light

6. DRIVER OPTION

ND	(Blank)
D-1%	0 – 10 V Dimming

7. FINISH

BL	Black
NAB	Aged Brass
WT	White

www.spec-lighting.com

SL
SPEC LIGHTING