

| | | |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|





Features

- Extruded aluminum with painted parts, treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel.
- 100 lumens per watt. Up to 1000 lumens per foot
- Polycarbonate milky diffuser is snapped into housing.
- Surge protector.
- Class II/P driver, 0-10V dimming as standard.
- 50,000+ Hours LED Life Expectancy.
- Power factor: >0.9.
- Driver disconnect provided where required to comply with UL certificate.
- Surface, suspended, wall mounted, recessed.
- 5 Year Warranty.
- Damp location.
- UL, cUL listed.
- Ambient Temperature: -30 ~ 40 °C (-22°F to +104°F).
- Damp location rated.



Dimensions

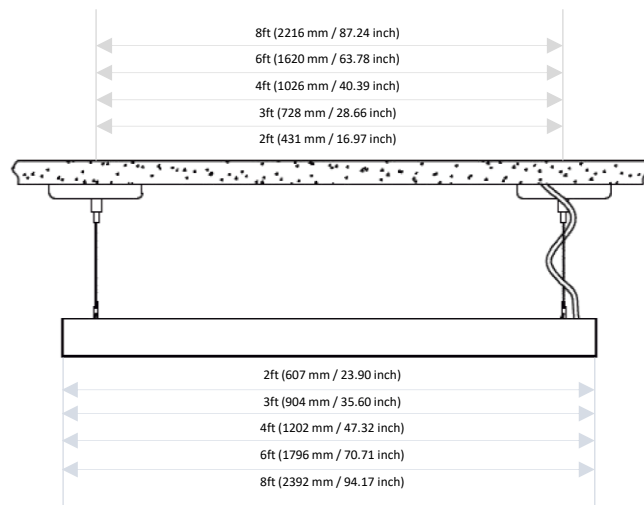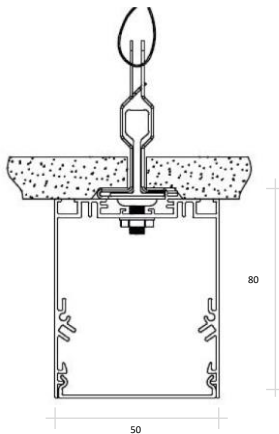


SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.


| | | |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|

UP and DOWN light ratio:

- CCT Tunable switch.
- Wattage selectable switch
- UP Ratio selectable switch.
- DOWN Ratio selectables switch.

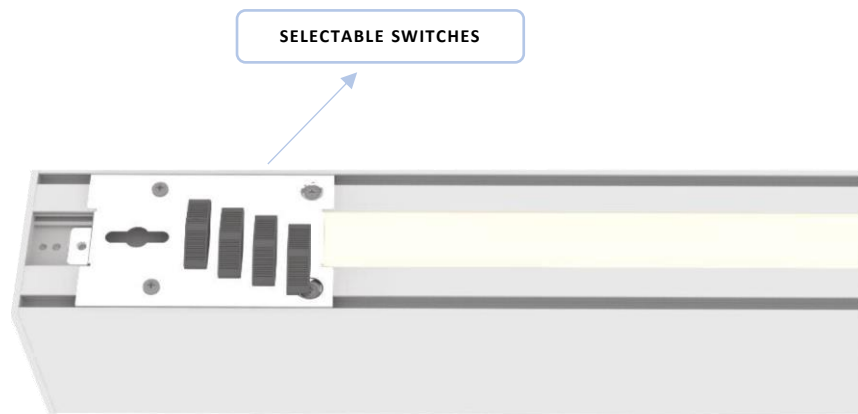

UP and DOWN ratio

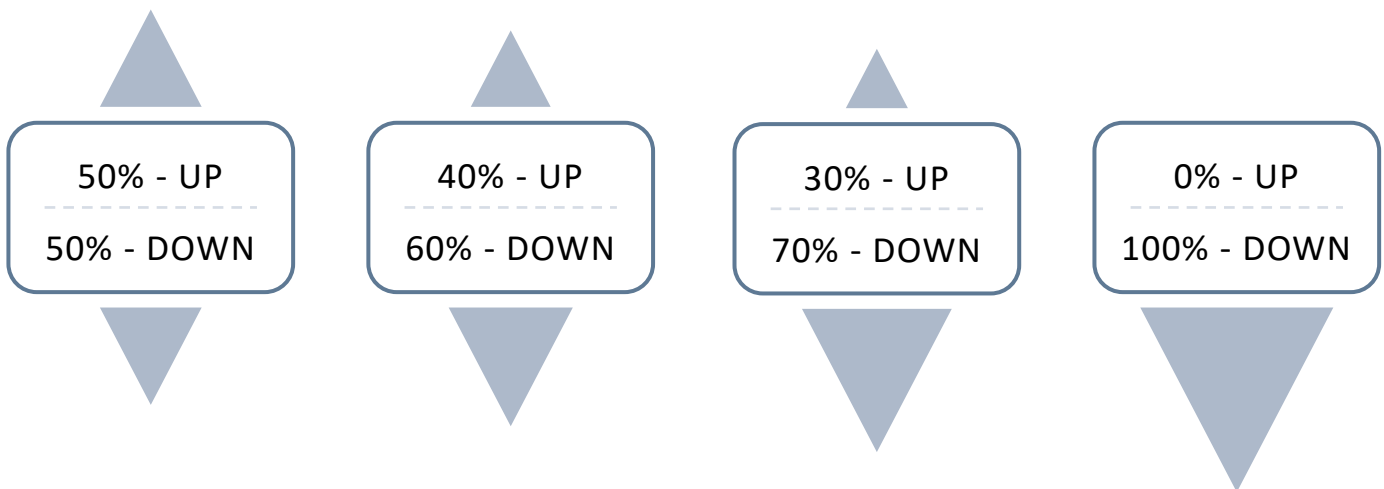

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.

| | | |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|

Ordering Code

EX: SL-ARC-2"-2-30K-20-SM-LM-D1-A-120V

| SERIES | LENGTH (FT) | COLOR TEMP | WATTS |
|--|--|--|--|
| SL-ARC-2 <ul style="list-style-type: none"> 2" LED Arc Linear Fixture | <ul style="list-style-type: none"> 2 2 FT 3 3 FT 4 4 FT 5 5 FT 6 6 FT 8 8 FT | <ul style="list-style-type: none"> 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K CCT - Tunable | <ul style="list-style-type: none"> 20 – 20W 30 – 30W 40 – 40W 50 – 50W 60 – 60W 80 – 80W |
| MOUNTING | COLOR OF LENS | DRIVER | ACCESORIES |
| <ul style="list-style-type: none"> SM Surface mounted PM Pendant Mount RM Recessed Mount WM Wall Mount | <ul style="list-style-type: none"> LM Milky Lens NL No Lens CL Clear Lens LV Louver | <ul style="list-style-type: none"> D1 120-277V D2 347V D3 120-347V D4 120-277V Wattage Selectable D5 120-347V Wattage Selectable D6 347-480V | <ul style="list-style-type: none"> blank No Sensor & EM MS With Sensor EM Emergency Pack |
| VOLTAGE | FINISH | | |
| <ul style="list-style-type: none"> 120V | <ul style="list-style-type: none"> BK Black WH White | | |

SPECIFICATIONS SUBJECT TO CHANGE, CONSULT FACTORY WHEN CRITICAL.